



1000 bar 1.5m Interconnecting Hose

This 1000 bar working pressure interconnecting hose is manufactured from multi spiral reinforced high pressure flexible hose, colour coded GREEN.


The hoses are delivered fully assembled with tee block, self sealing quick connect couplings and nipple for fast and clean operation. The quick connectors are fitted with GREEN plastic dust caps.

Hoses are assembled, filled with oil and pressure tested prior to despatch. Test certificates are supplied.

All hoses are marked with serial numbers for identification. Hoses are assembled with a clear PVC cover for additional protection against abrasion and chemical attack.

Minimum burst pressure is 2600 bar and the minimum bend radius is 95mm. This hose assembly conforms to the European Pressure Equipment Directive and is CE marked.

Self sealing quick connect coupling outlet with green plastic dust cap

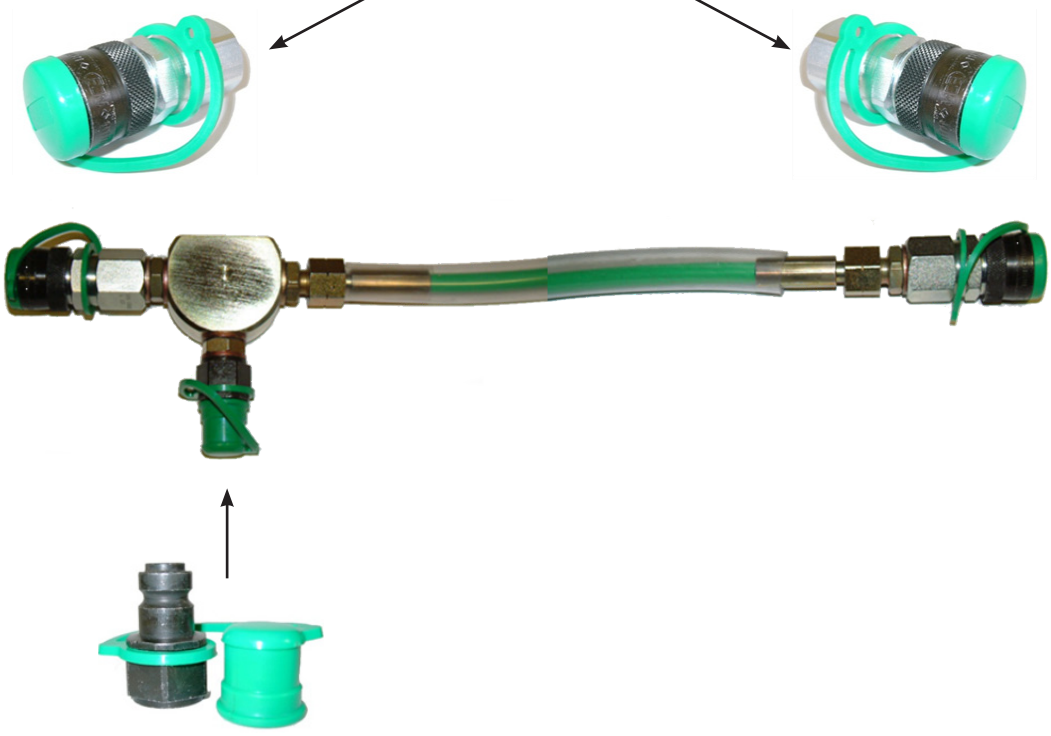

Self sealing quick connect nipple inlet with green plastic dust cap

1.5m Interconnecting Hose
CE Marked

Part No BT-1048-1.5

BOLTIGHT
HYDRAULIC BOLT TENSIONING
BOLTIGHT is the UK Registered Trade Mark of Boltight Limited

Boltight Limited, Unit 2, Junction 10 Business Park, Bentley Mill Way, Walsall, West Midlands, WS2 0LE, United Kingdom.
Tel: +44 (0)845 500 5556 Fax no. +44 (0)845 500 5557
email: sales@boltight.com www.boltight.com