



1500 bar 1.5m Link Hose

This 1500 bar working pressure hose is manufactured from multi spiral reinforced high pressure flexible hose, colour coded BLUE.

The hoses are delivered fully assembled with self sealing quick connect couplings and nipples for fast and clean operation. The quick connectors are fitted with BLUE plastic dust caps.

Hoses are assembled, filled with oil and pressure tested prior to despatch. Test certificates are supplied.

All hoses are marked with serial numbers for identification. Hoses are assembled with a clear PVC cover for additional protection against abrasion and chemical attack.


Minimum burst pressure is 4500 bar and the minimum bend radius is 150 mm. The hose length is 1.5 metres. This hose assembly conforms to the European Pressure Equipment Directive and is CE Marked.



Self sealing quick connect nipple with blue plastic dust cap



Self sealing quick connect coupling with blue plastic dust cap

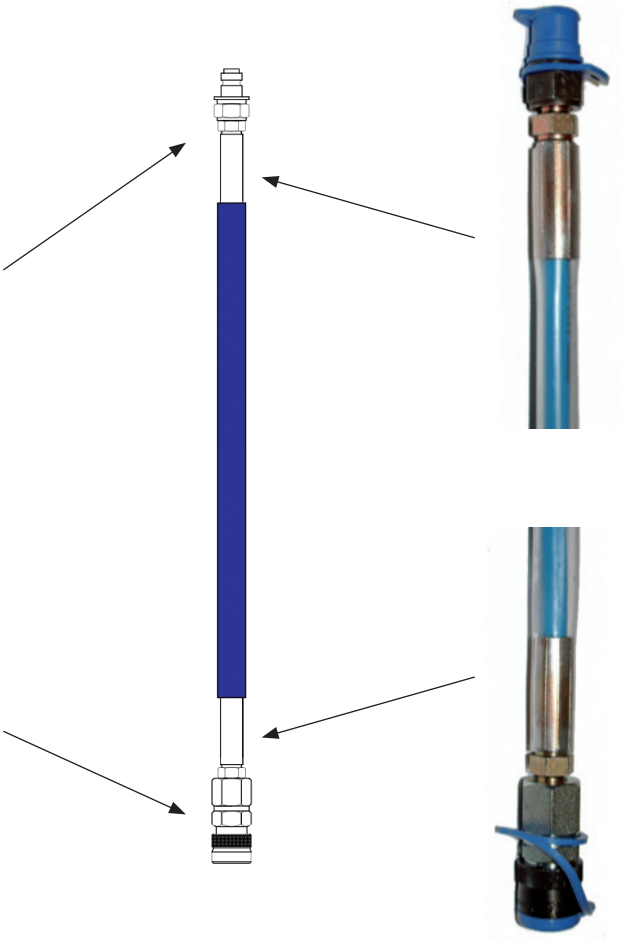

1.5m Link Hose

CE Marked

Part No BT-1540-1.5

BOLTIGHT
HYDRAULIC BOLT TENSIONING
BOLTIGHT is the UK Registered Trade Mark of Boltight Limited

Boltight Limited, Unit 2, Junction 10 Business Park, Bentley Mill Way, Walsall, West Midlands, WS2 0LE, United Kingdom.
Tel: +44 (0)845 500 5556 Fax no. +44 (0)845 500 5557
email: sales@boltight.com www.boltight.com