



1500 bar Cross Block - 1 inlet 3 outlets


This cross block is designed for 1500 bar working pressure.

The cross block is delivered fully assembled with self sealing quick connect couplings and nipple for fast and clean operation. The quick connectors are fitted with BLUE plastic dust caps.

The cross block is assembled, filled with oil and pressure tested prior to despatch. Test certificates are provided.

All cross blocks are marked with the maximum working pressure, the part number and a serial number for identification.

This cross block conforms to the European Pressure Equipment Directive and is CE Marked.

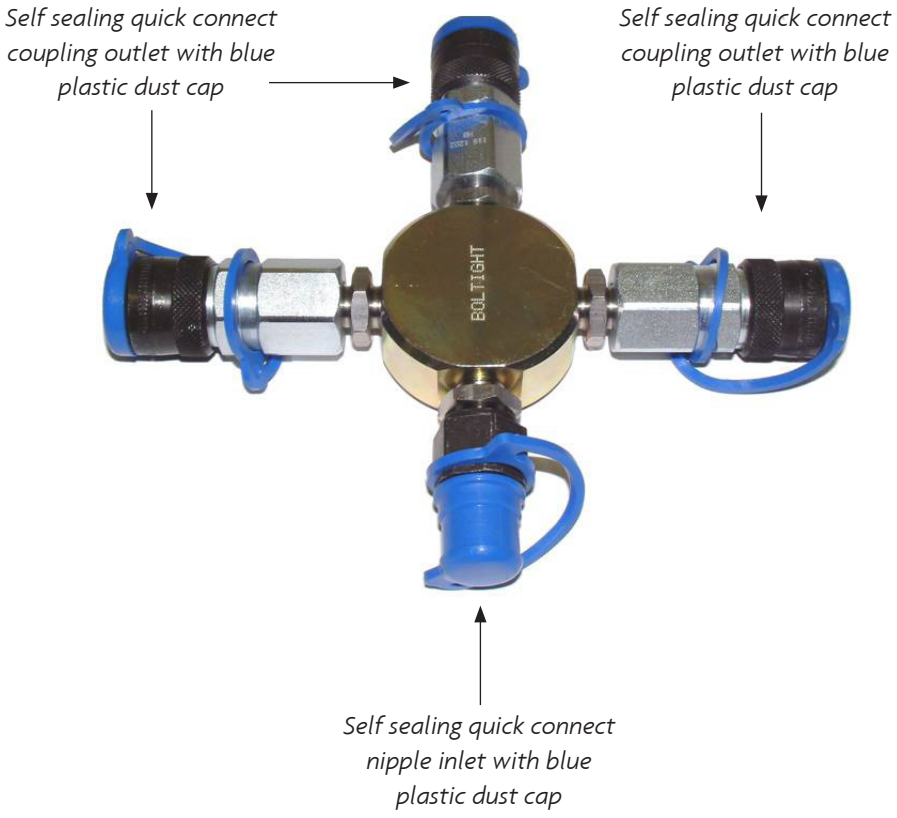

Cross Block
CE Marked

Part No BT-1546

BOLTIGHT
HYDRAULIC BOLT TENSIONING
BOLTIGHT is the UK Registered Trade Mark of Boltight Limited

Boltight Limited, Unit 2, Junction 10 Business Park, Bentley Mill Way, Walsall, West Midlands, WS2 0LE, United Kingdom.
Tel: +44 (0)845 500 5556 Fax no. +44 (0)845 500 5557
email: sales@boltight.com www.boltight.com