



1500 bar Four Outlet Manifold Block with Manual Stop Valves

The maximum working pressure for this four outlet Manifold Block with Stop Valves is 1500 bar. The manifold is assembled with self sealing quick connectors for fast and clean operation.

The inlet is fitted with a quick connect male nipple. The four outlets are fitted with quick connect female couplings. The quick connectors are fitted with plastic dust caps


All hoses are marked with serial numbers for identification. Hoses are assembled with a clear PVC cover for additional protection against abrasion and chemical attack.

Each manifold block is filled with oil and pressure tested prior to despatch. Test certificates are supplied. All manifolds are identified by serial numbers.

The manifold conforms to the requirements of the European Pressure Equipment Directive and is CE marked

Four tool outlets via self sealing quick connect coupling, fitted with plastic dust caps

Four outlets controlled by manually operated stop valves

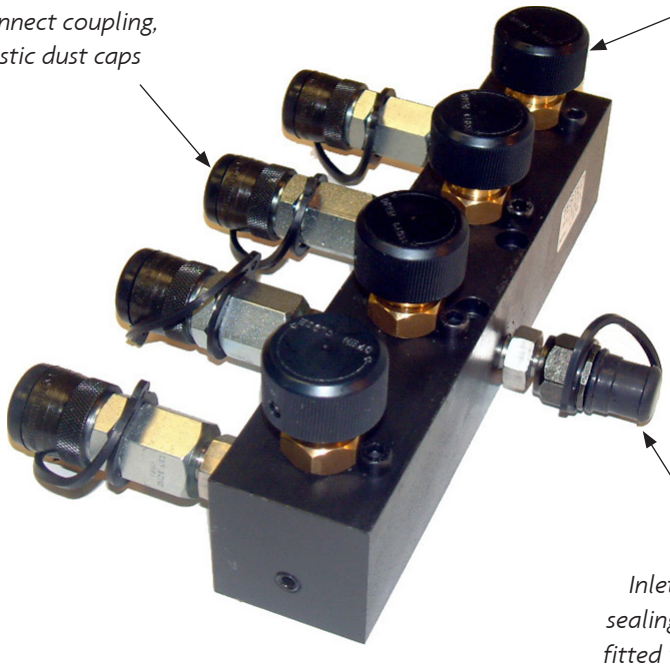

Inlet from pump via self sealing quick connect nipple fitted with a plastic dust cap

CE Marked

Part No BT-1570

BOLTIGHT
HYDRAULIC BOLT TENSIONING
BOLTIGHT is the UK Registered Trade Mark of Boltight Limited

Boltight Limited, Unit 2, Junction 10 Business Park, Bentley Mill Way, Walsall, West Midlands, WS2 0LE, United Kingdom.
Tel: +44 (0)845 500 5556 Fax no. +44 (0)845 500 5557
email: sales@boltight.com www.boltight.com