



1500 bar Manifold Block (5 outlet)

The maximum working pressure for this five outlet Manifold Block is 1500 bar. The manifold block is assembled with self sealing quick connectors for fast and clean operation.

The quick connectors are fitted with plastic dust caps. Each manifold block is filled with oil and pressure tested prior to despatch. Test certificates are supplied.


All manifolds are identified by serial numbers. They conform to the requirements of the European Pressure Equipment Directive and are CE marked.

This manifold block can be used to drive five tools simultaneously. When used in conjunction with BT-1580 it is ideally suited to the connection of eight hydraulic tools for simultaneous operation. Alternatively, when using four tools a pressure gauge can be connected to the central outlet.

Any number of these manifold blocks may be connected together, either by direct connection or with a flexible hose connected between the blocks. This manifold block is also available with 1500 bar swivels fitted to the outlet connectors.

Inlet via self sealing quick connect nipple fitted with a plastic dust cap

Five outlets via self sealing quick connect coupling, fitted with plastic dust caps

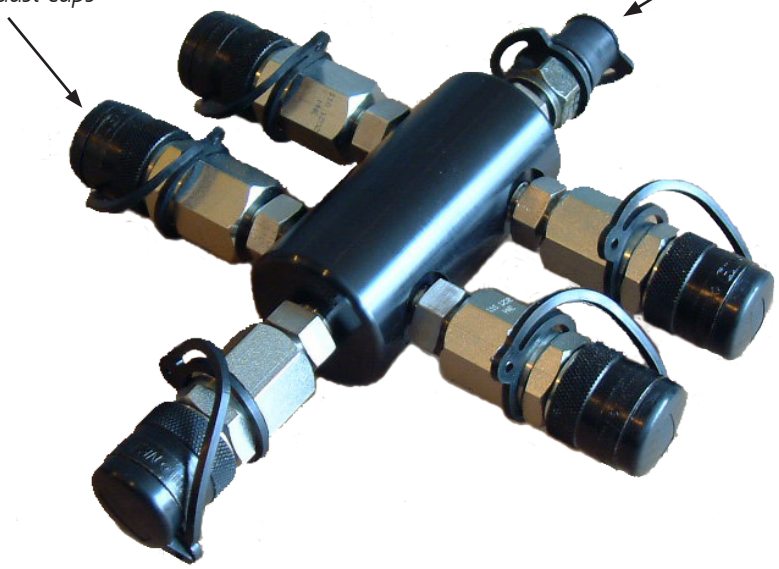

See also data sheets BT-1580 and DS-612

Quick connectors are Type B see data sheet DS-26 for details

1500 bar Manifold Block (5 outlet)

CE Marked

Part No BT-1581

BOLTIGHT
HYDRAULIC BOLT TENSIONING
BOLTIGHT is the UK Registered Trade Mark of Boltight Limited

Boltight Limited, Unit 2, Junction 10 Business Park, Bentley Mill Way, Walsall, West Midlands, WS2 0LE, United Kingdom.
Tel: +44 (0)845 500 5556 Fax no. +44 (0)845 500 5557
email: sales@boltight.com www.boltight.com