



2500 bar Four Outlet Manifold

The maximum working pressure for this four outlet Manifold Block is 2500 bar. The manifold blocks are assembled with self sealing quick connect couplings for fast and clean operation.

The quick connectors are fitted with plastic dust caps. Each manifold block is filled with oil and pressure tested prior to despatch. Test certificates are supplied.


All manifolds are identified by serial numbers. They conform to the requirements of the European Pressure Equipment Directive and are CE marked.

This manifold block is ideally suited to the connection of four hydraulic bolt tensioning tools for simultaneous operation.

The manifold block is also available with 2500 bar swivels fitted to the four outlets for increased flexibility and ease of use during simultaneous bolt tensioning.

Four tool outlets via self sealing quick connect coupling, fitted with plastic dust caps

Inlet from pump via self sealing quick connect nipple fitted with a plastic dust cap

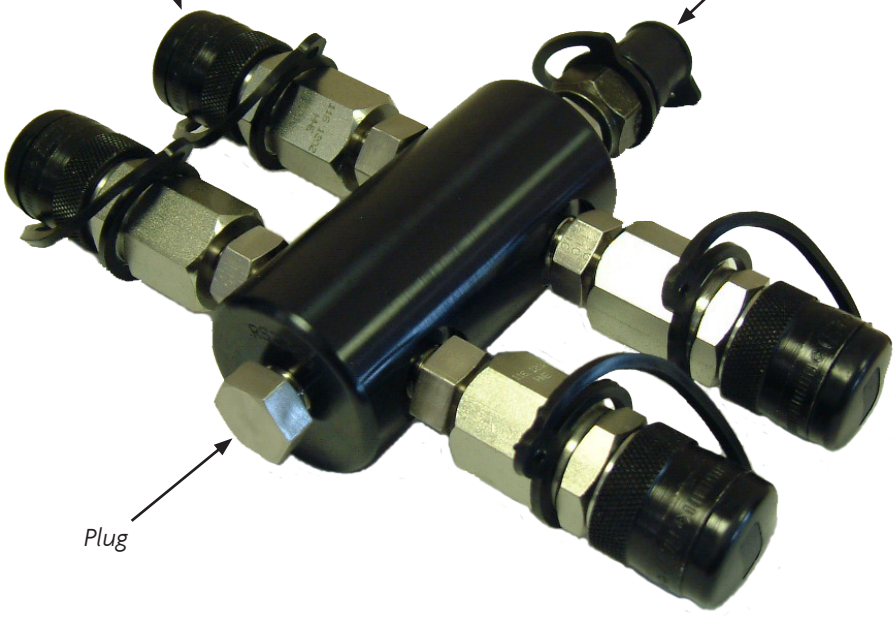

Plug

See also data sheets BT-2581 and DS-612

Quick connectors are Type B See data sheet DS-26 for details

2500 bar Manifold Block (4 outlet)

CE Marked

Part No BT-2580

BOLTIGHT
HYDRAULIC BOLT TENSIONING
BOLTIGHT is the UK Registered Trade Mark of Boltight Limited

Boltight Limited, Unit 2, Junction 10 Business Park, Bentley Mill Way, Walsall, West Midlands, WS2 0LE, United Kingdom.
Tel: +44 (0)845 500 5556 Fax no. +44 (0)845 500 5557
email: sales@boltight.com www.boltight.com