




Connecting an External Pressure Gauge

When the small size of the integral pressure gauge of the hand pumps is too small or more accurate reading is required, an external pressure gauge can be connected as shown. If more flexibility is required or the gauge is to be mounted some distance from the pump a flexible hose, of any length, can be connected between the Tee Block and the Gauge.

External gauges are liquid filled for damping and fitted with a self sealing quick connect nipple for easy connection. When not in use the gauge is easily removed a stored safely. The external gauge can be boxed or mounted on a board to suit customer requirements.
A calibration certificate is supplied with every gauge.

A range of pressure gauges are available. Gauge sizes are 150 mm and 250 mm diameter. 250 mm Test Gauges with calibration certificates are also available. Gauges are available for maximum pressures from 1700 bar to 3500 bar.

External Pressure Gauge

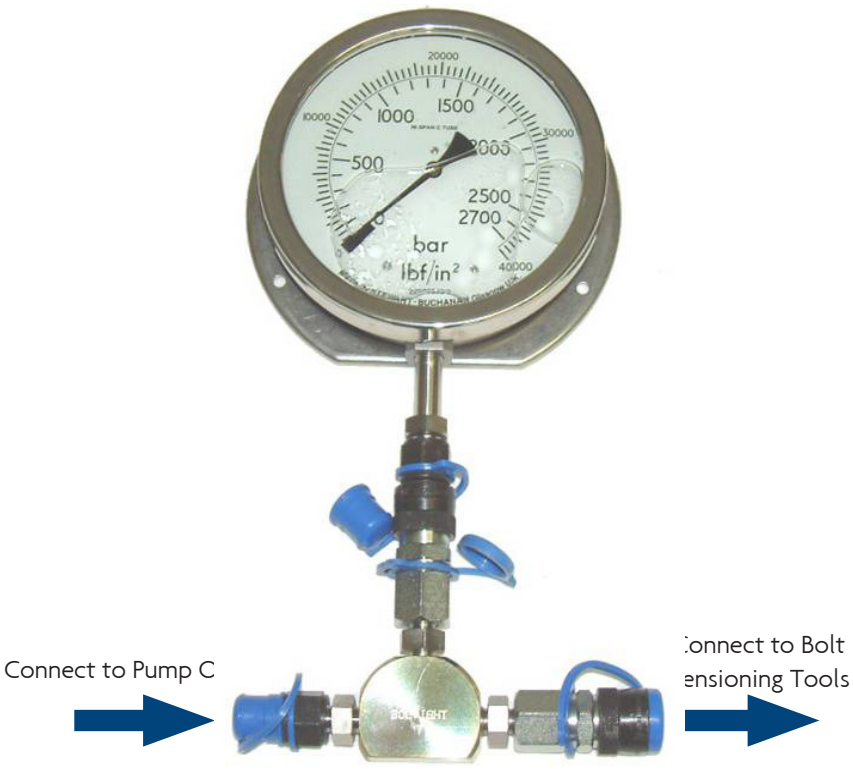

Tee Block
BT-1557

BOLTIGHT
HYDRAULIC BOLT TENSIONING
BOLTIGHT is the UK Registered Trade Mark of Boltight Limited

Boltight Limited, Unit 2, Junction 10 Business Park, Bentley Mill Way, Walsall, West Midlands, WS2 0LE, United Kingdom.
Tel: +44 (0)845 500 5556 Fax no. +44 (0)845 500 5557
email: sales@boltight.com www.boltight.com