




2000 bar Flexible Hose Assemblies

These 2000 bar working pressure hose assemblies are manufactured from multi spiral reinforced high pressure flexible hose, colour coded RED. They are delivered fully assembled with self sealing quick connect couplings and nipples for fast and clean operation. The quick connectors are fitted with RED plastic dust caps.

Hoses are assembled, filled with oil and pressure tested prior to despatch. Test certificates are available. All hoses are marked with serial numbers for identification.

Hoses are assembled with a clear PVC cover for additional protection against abrasion and chemical attack. Minimum burst pressure is 6550 bar and the minimum bend radius is 200 mm. Minimum hose length is 1m. Hoses are available in multiples of 0.1m length.

Special hose assemblies can be made to meet your needs. Please send details of your requirements for a fast response.

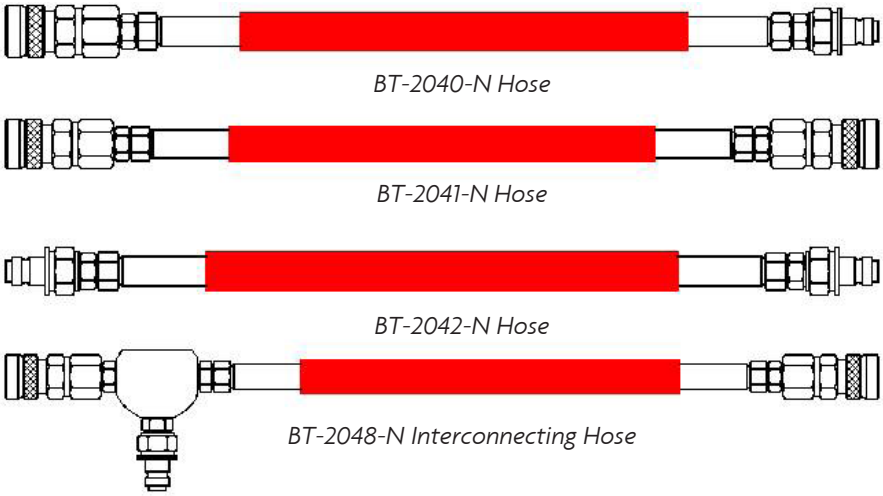

BT-2040-N Hose

BT-2041-N Hose

BT-2042-N Hose

BT-2048-N Interconnecting Hose

BT-2050-N Interconnecting Hose

BT-2049-N Interconnecting Hose

BT-2058-N Interconnecting Hose

N = Hose length in metres

BOLTIGHT
HYDRAULIC BOLT TENSIONING
BOLTIGHT is the UK Registered Trade Mark of Boltight Limited

Boltight Limited, Unit 2, Junction 10 Business Park, Bentley Mill Way, Walsall, West Midlands, WS2 0LE, United Kingdom.
Tel: +44 (0)845 500 5556 Fax no. +44 (0)845 500 5557
email: sales@boltight.com www.boltight.com